




STRUCTURE, SIZE & PATTERN SWITCHING


Dimension:mm

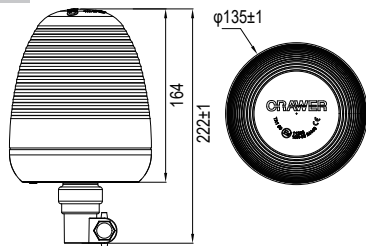


Take out lamp



Fasten lamp
on DIN pole



Installation finished



- ①:Single flashing
- ②:Double flashing
- ③:Slow turning
- ④:Fast turning

Switch to a
flash pattern

CRAWER
LIGHTING TECHNOLOGY

LED Beacon Warning Light



CR-7005

ECE R65 / R10 & IP69K standard waterproof

Energy efficient

Long light distance

High level EMC, CISPR 25 Class 4

ECE
R65/R10

IP69K
WATERPROOF

-40°C
to
50°C

LED
HIGH-QUALITY

LED BEACON WARNING LIGHT FEATURES:

- IP69K waterproof.
- High level EMC, CISPR 25 Class 4.
- Multi-voltage, suitable for 12-30V
- Flexible DIN pole
- Highly transparent PC lampshade.
- Warranty: 1 year.



CAUTION

Ensure tight connection on DIN connector of pole mount to avoid losing beacon or bad connection.

Resistor:	With load resistor
Size:	222*135*135 mm
Voltage:	12V~30V DC
LED:	45pcs LEDs
Power:	55W
Current flow:	4.58A@12V; 2.29A@24V
Light Color:	Amber
Flash pattern:	Single flash, Double flash, Turning slow, Turning fast.
Flash pattern switch:	Button
EMC Grade:	CISPR 25 Class 4
Flash Frequency:	$2\text{ Hz} \leq F \leq 4\text{ Hz}$
Housing Material:	Aluminium
Lens Material:	Anti-UV PC
Screw:	304 Stainless Steel
Weight:	1140g
Mounting:	Flexible DIN Pole
IP Rate:	IP69K
Shock proof:	10G
Operating Temperature:	-40°C to +50°C
Approvals:	ECE R65 / R10, CE,RoHs
Warranty:	1 Year