Product Information Sheet

CRAWER
LIGHTING TECHNOLOGY

CRAWER CR-8003

STYX-CORE Pocket Light

MATERIALS & FEATURES

Weight: 225g
Durable housing and lens
210 degree Flexible handle
Super strong magnet on the handle
3-level battery indicator for clear charge status

OPTICS

Floodlight	High: 800 lumens / 3h
	Medium: 400 lumens / 4h
	Eco: 160 lumens / 10h
Spotlight	250 lumens / 4.5h


ELECTRONIC CHARACTERISTICS

Voltage: 3.7V
Capacity: 2600mAh
Operation temperature: -10°C to 40°C

CERTIFICATES

CE, RoHs
IP65 (dust and water resistance)
IK07 (impact resistance)

PRODUCT SIZE

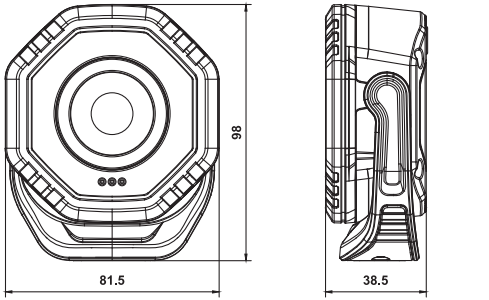



Product Information Sheet

CRAWER
LIGHTING TECHNOLOGY

SAFETY INSTRUCTIONS

For safe and reliable use of your CRAWER inspection light, please follow these safety instructions.



Read before use
This product is intended for professional and workshop use only.



Do not use if damaged
Do not use the lamp if it is damaged, cracked, or malfunctioning.



Keep out of reach of children
This product is not a toy.



Do not look directly into the light
Do not look directly into the LED light beam to avoid eye injury.



Avoid extreme temperatures
Do not expose the battery to heat, fire, or temperatures above 50°C.



Avoid water and moisture
Do not expose the charger, lamp or charging port to water or moisture.



Use proper charger and cable
Only use the supplied charger and cable. Do not use if damaged.



Charge correctly
Charge the lamp in a dry, well-ventilated area. Disconnect the charger when fully charged.



No explosive environments
Do not use in explosive atmospheres (e.g. near fuel vapors or dust)



Keep away from flammable materials
Keep the lamp away from flammable materials.



Secure placement
Ensure stable placement when using the lamp with a hook or magnetic base.



Avoid harsh chemicals
Do not use aggressive chemicals or solvents. Clean only with a dry or slightly damp cloth.



Inspect regularly
Inspect regularly for wear or damage. Do not use if any parts are worn or damaged.